



Cables

Overhead line systems

Insulating sticks

Specific sticks and bags

Underground systems

Insulating sticks for short-circuiting and earthing systems


These 39 mm dia. elements are assembled using a new safety bayonet system connector in aluminium alloy. They allow construction of a large variety of custom made sticks that meet the most varied conditions of application. Calibrated lengths of 1 to 3 meters (with fraction of 0.50 m) permit a huge number of applications.

This range thus allows a stick-length limitation in **IEC-61235** case of space requirements and carrying capabilities. For common applications a serie of complete sets including 2 or 3 elements are made to give simple solutions for working distance from 2 to 6 meters.


Reference	Complete stick length (m) [•]	Complete stick length (m) ^{••}	Insulating length (m)	Weight (kg)
Basic elements				
CM-4410	1.13		0.7	1.25
CM-4415	1.63		1	1.70
CM-4420	2.13		1.2	2.70
CM-4425	2.63		1.5	3.20
Intermediate elements				
CM-4410-I	1.165		0.9	1.20
CM-4415-I	1.665		1.4	1.60
CM-4420-I	2.165		1.9	2.50
CM-4425-I	2.665		2.4	3.00
Terminal elements				
CM-4410-*	1.115	1.21	0.9-1	0.90
CM-4415-*	1.615	1.71	1.4-1.5	1.30
CM-4420-*	2.115	2.21	1.9-2	2.10
CM-4425-*	2.615	2.71	2.4-2.5	2.60
Intermediate elements with rain skirts				
CM-4400-J	0.36			0.95

* Add end piece C, K, E.

• With the smallest end fitting.
•• With the biggest end fitting.

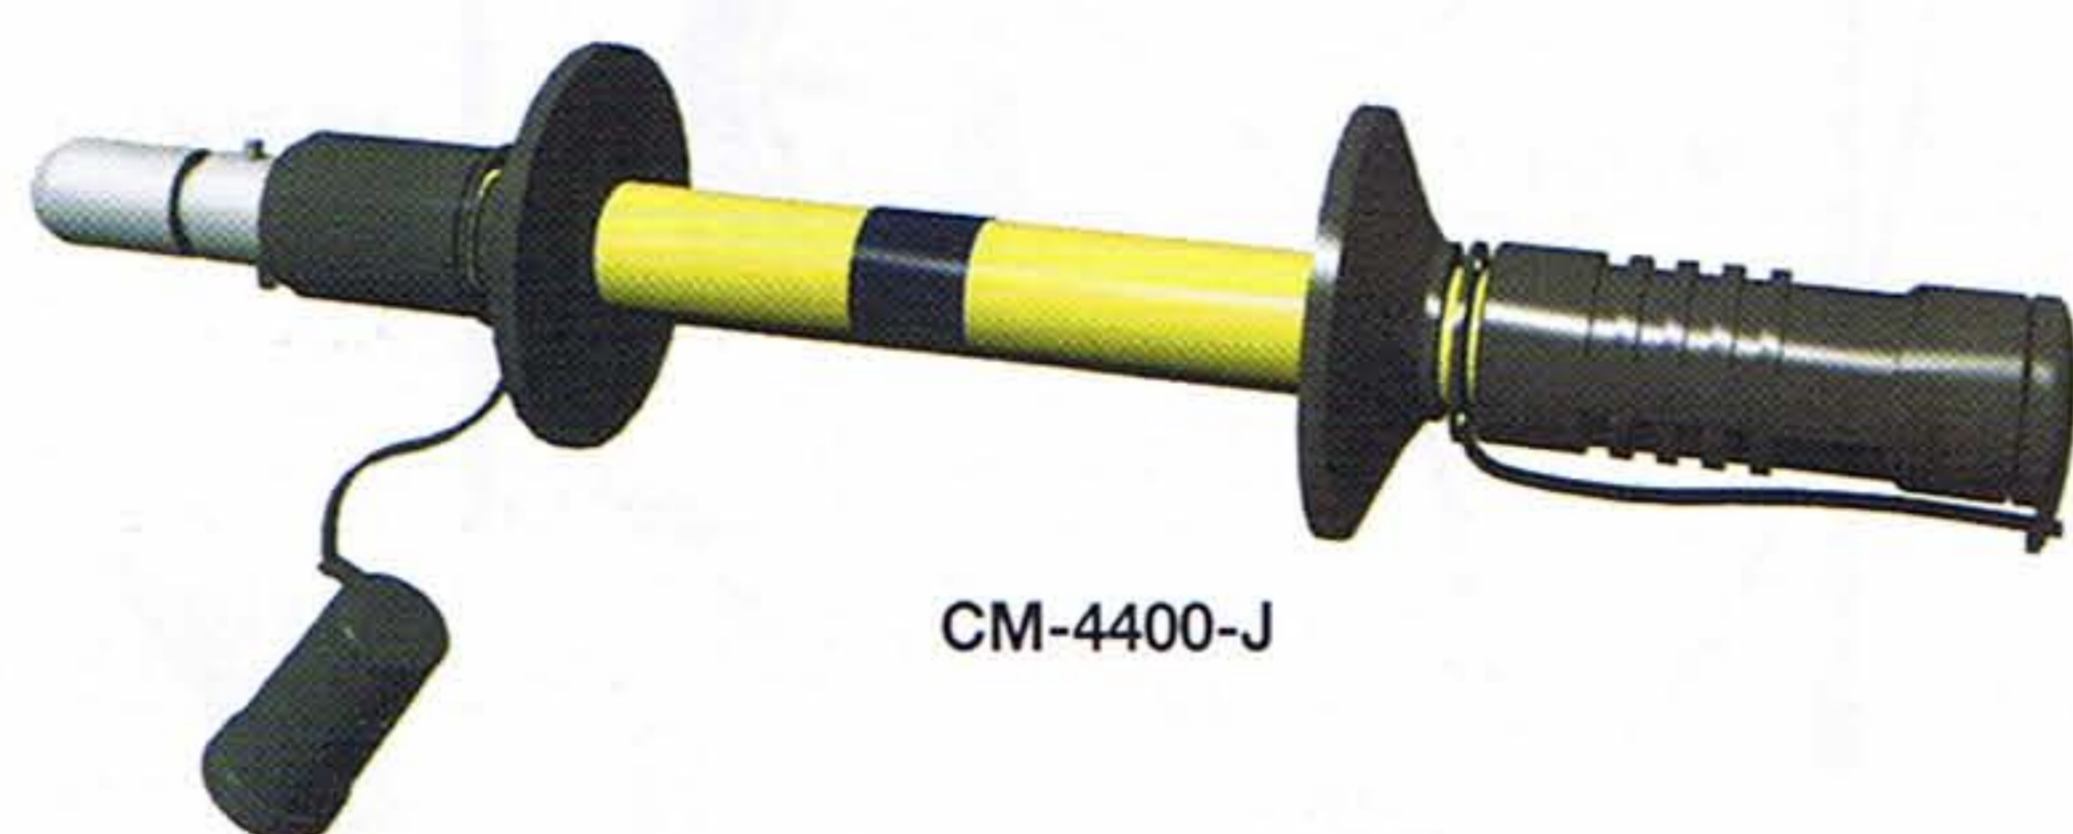

CM-4400-J

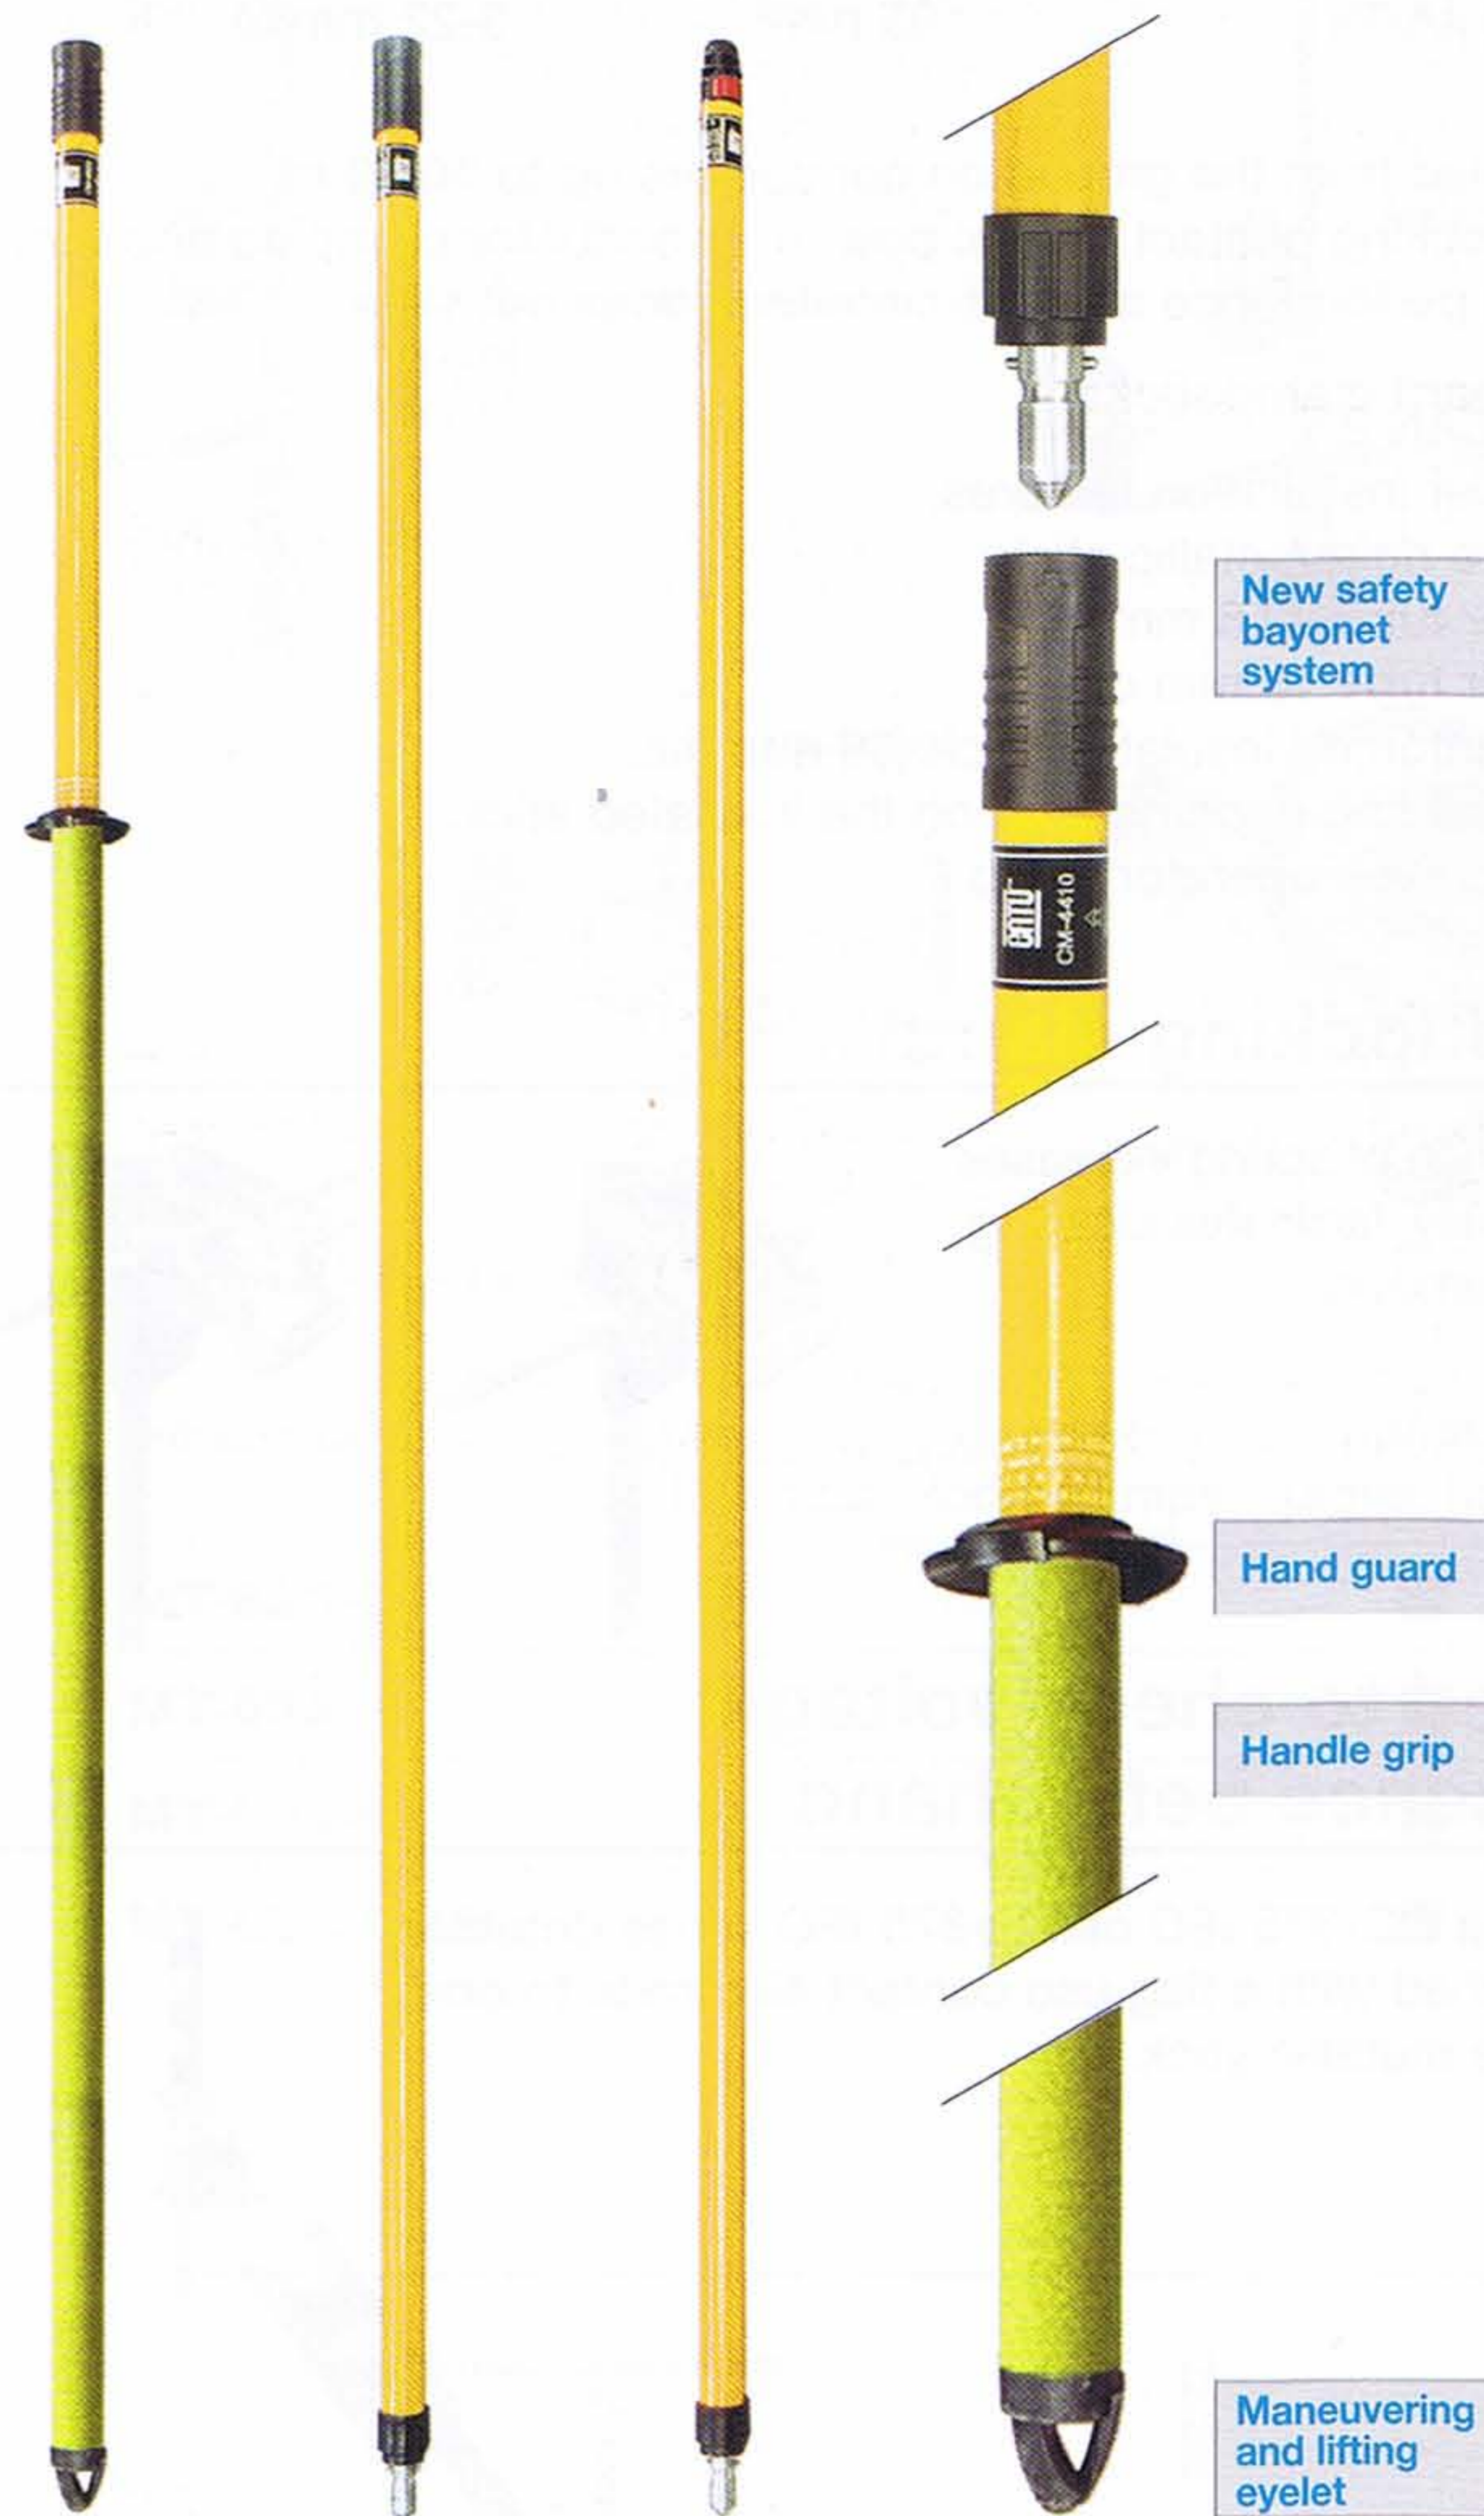

New safety bayonet system

Hand guard

Handle grip

Maneuvering and lifting eyelet

Sticks with rain skirts, C, K or E terminals

Epoxy reinforced fibre-glass insulating Ø 36 mm. **IEC-61235**
Shock resisting polycarbonate rain skirts Ø 100 mm, height 90 mm.

Reference	Length (m)	Rain skirt number	Weight (kg)
CF-5-40*	1.50	1	1.150
CF-5-90*	2.00	1	1.550

* Add end piece C, K, E.

Stick covers

Strong waterproof fabric, strap for carrying for CM-4 and CM-7.

Reference	Elements length (m)	Overall dimensions (m)
CM-3-03	1.75	0.575 x 1.950
CM-3-04	2.00	0.575 x 2.450
CM-3-05	2.50	0.575 x 2.950
CM-3-06	3.00	0.575 x 3.400

