

Padlocks, warning signs and delineators

Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Saving kits

Intervention kits




CG-35/2



CG-30 (IEC 60903)



CT-7-25/1

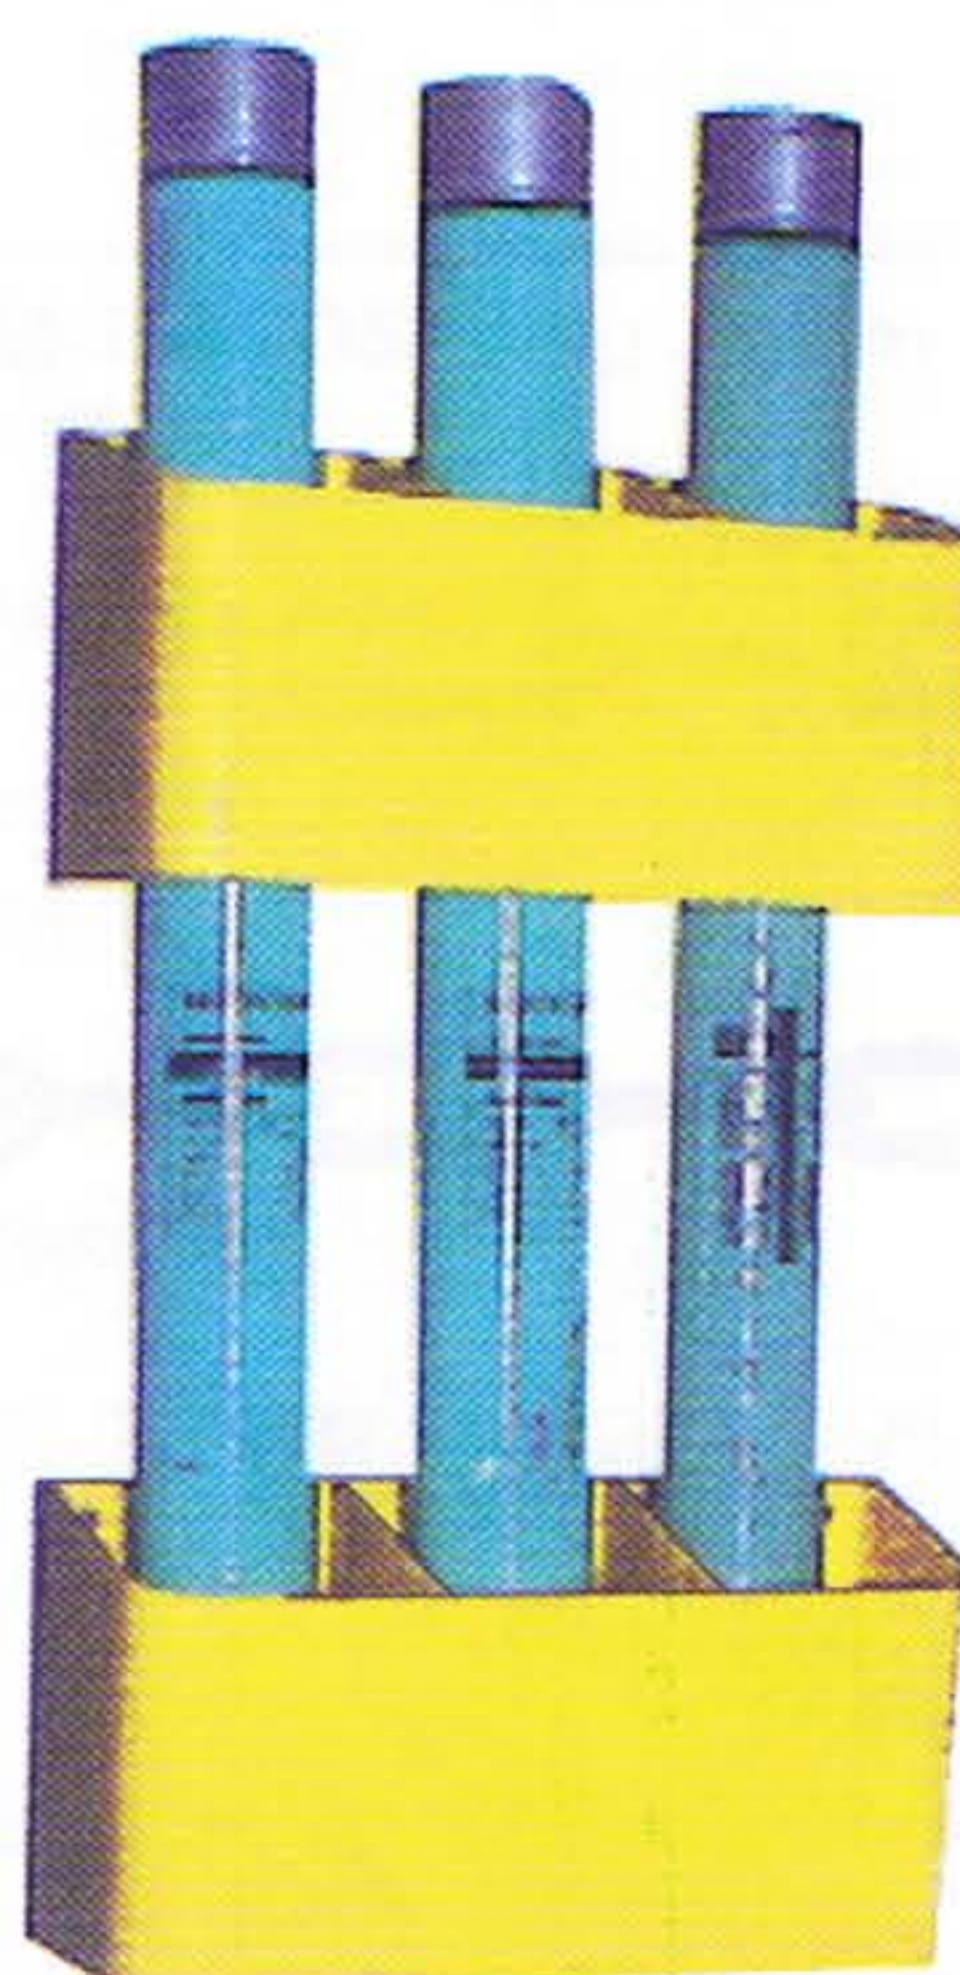

CI-23



MP-42/16



MP-20

CS-45

Reference	Composition	Characteristics	Dimensions
CG-30-C	Insulating rubber gloves	26 500 V max	size 10
CG-35/2	Rubber gloves box		101 x 224 x 476 mm
CI-23	Fuse holder		90 x 240 x 260 mm
CS-45	Rescue stick	45 kV	1.65 m
CI-06-D	Wall mounted supports	Delivered with CS-45	
CT-7-25/1*	Insulating platform	24 000 V max	500 x 500 x 220 mm
MP-42/16**	Insulating MAT	≤ 26.5 kV	0.6 x 1 mm

KIT-01* Intervention kit with insulating platform

KIT-10** Intervention kit with insulating mat delivered with a protective P.V.C. container

Padlocks, warning signs and delineators

Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Saving kits

Safety lamps

For MV indoor substations.

CD-122 Halogen lamp - Automatic switch on in case of power break
Adjustable flood beam - power beam:
5.5 W Operates: 3 hours - Weight: 1.2 kg

CD-124 Delivered with a wall mounted support
Bulb: 6 W/12 W
Operates: 1 hour (12 W), 2 hours (6 W)
Rechargeable on 230 V 50/60 Hz
3 positions switch: Off, 6 W, 12 W
100 x 190 x 220 mm - Weight: 1.9 kg



CD-124



CD-122

Intrinsically safe Atex torch light

⊕ II 2GD EEx ibe IIC T4 or T6.
Zone 1 and 2 - 21 and 22.
- Simple optical system.
- Power supply by 1.5 V LR20 batteries (x3).
- Bulb P13, 559 - 3.7 V - 0.3 A.
- IP 66.

CD-103 Torchlight Ø 50 x 244 mm - Weight: 0.250 kg

MS-115-1 Bulb for CD-103 (ordering by 5)



Double optical systems.
⊕ II 2GD EEx ibe IIC T6 or T4 or T3.
Zone 1 and 2 - 21 and 22.
Protection mode (suitable for all areas and gases).
Appropriate certificates for Merchant Marine and VERITAS.
Power supply by 1.5 V LR20 batteries (x2).
Fixed light or intermittent optical signals.
IP 66/68.

CD-104 Dimensions: 230 x 90 x 90 mm - Weight: 400 g



Intrinsically safe ATEX LED's Headlamp

⊕ II 2GD EEx ia IIC T4.
Can be carried either on the head or any kind of helmet.
- Lighting by 3 high performance White LEDs.
- 2 lighting levels (High: 3 LEDs on or low: 1 LED on).
- Adjustable lamp height angle.
- Very light, ABS body.
- ATEX certified Categorie 2 (Zone 1)
N° TRL03ATEX21005X.
- Range: 10 to 15 meters.
- Powered by 3 batteries LR03 (AAA).
- Autonomy: 150 hours.
- Strap: cloth or silicone rubber (for helmet).

MS-126 Delivered with batteries - Weight: 0.125Kg

M-95-864 Hooks set for helmet



CE