


Insulating rubber gloves

Insulating rubber gloves conform to international IEC-60903 standard.

To satisfy the requirements of this standard; they are subjected to dielectrical, mechanical resistance and ageing tests. The acceptance levels for mechanical tests are stricter. The tests are especially aimed at checking the tensile strength and elongation at break, the mechanical puncture test and tension set. Our gloves are made of latex especially treated to obtain high dielectric characteristics; they are individually tested and delivered in sealed plastic bags.

IEC-60903 
EN 60903
CE

Reference	Class	Voltage (V)	Designation	Overgloves size	Weight (g)
CG-15 (*)	1	7 500	latex	**	270
CG-20 (*)	2	17 000	latex	**	450
CG-30 (*)	3	26 500	latex	**	560




* References to be completed by size A, B, C, D

** See below

Correspondence with standard sizes: A = 8, B = 9, C = 10, D = 11

Composite gloves

Insulating gloves with higher mechanical properties for working in full safety without leather overgloves.

IEC-60903 
CE

Reference	Class	Voltage (V)	Designation	Weight (g)
CG-16 (*)	1	7 500	orange composite gloves with mechanical properties	400
CG-22 (*)	2	17 000	orange composite gloves with mechanical properties	500



* References to be completed by size A, B, C, D. Correspondence with standard sizes: A = 8, B = 9, C = 10, D = 11.

SELECTION BOARD SIZE INSULATING GLOVES/OVER GLOVES

Gloves reference	Gloves size	Overgloves reference	Overgloves size
CG-15 (*) CG-20 (*) CG-30 (*) 	A	CG-99 (*) 	B
	B		C
	C		D
	D		E

Insulating testing equipment

Equipment intended for the verification of the dielectric properties of gloves, insulating tools, elements for maneuvers, insulators, blankets, sleeves, etc. It possesses output voltages according classes 00, 0, 1, 2 and 3 of IEC standards.

The user of the CG-118 can set:

- Type of indication: acoustic signal that indicates if the insulation is fulfilling or not the standard or digital measurement of the leakage current of the element under test.
- Test period
- The language
- Select an Auto diagnose test

Technical features:

Output voltage: 2.5, 5, 10, 20, 40 kVCC.

Class tests: 00, 0, 1, 2 and 3 according IEC.

Input voltage: 110-220 VAC / 50-60 Hz. / 12 VCC and internal rechargeable battery.

Accessories: Bucket for testings

Input and earthing cables

Rubber gloves test electrodes

User's manual


Carrying case



CG-118

Insulating testing equipment

Accessories

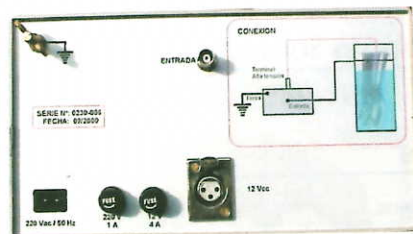

Back panel CG-118

Pneumatic glove tester

For compulsory control of gloves before use. Checking is done by inflating and immersing in water.



CG-117

140 x 150 x 160 mm - Weight: 0.600 kg

Undergloves

Cotton undergloves

To be used with insulating rubber gloves.

These washable cotton undergloves improve the use of the insulating gloves.

They bring the best held, hygiene and a greater comfort.



CG-80 ()**

** H: men / F: women

Nomex undergloves

Undergloves 100 % Nomex.

To be used under insulating gloves, for a protection against the electric hazard.

FR - Flame Resistant undergloves.

Ideal complement to Arc Flash Equipment (see page 68)



CG-37

Nomex undergloves

Mittens

Cotton mittens.

Wearing these undergloves also limits the effects of perspiration: its fingerless gloves shape allowing to keep the maximum of dexterity.



CG-81

Mittens

Overgloves

Used as outer gloves to protect insulating gloves in dry environment.

Silicon grain leather, very flexible.

Large protective cuff in chrome tanned hide.

Red adhesive strap.



CG-99 (*)

Weight: 0.170 kg * Add size: C, D, E

Working gloves

Handling leather and cotton gloves. Docker type. Protection against mechanical risks.

EN 388

CE

3122



CG-97-C

Single size (C = 10)

Rubber gloves box

To be placed in high voltage stations, or to be carried.

Specially designed for protecting insulating gloves.

This plastic box also ensures the protection against UV radiation of insulating gloves.

The transparent cover enable to check gloves presence.

Bottle of talc included.

Can be fixed on wall.



CG-35/2

101 x 224 x 476 mm - Weight: 1.850kg

Carrying bag

Made from reinforced waterproof fabric for transport of rubber gloves in vehicles and tool boxes.

Rear loop for belt and snaps.



CG-36

90 x 175 x 585 mm - Weight: 0.120 kg

Electrician suit see page 24