

Sticks accessories

Tensioning equipment

Handling and uncoiling blocks

Uncoiling block

For bare cables.
Made entirely from aluminium alloy.
Pivoting safety hook. Full wheel rigger. Ring with greaser.
Safety catch.

For insulated cables.
Single piece body made of aluminium alloy. Nylon strap (length 1.5 m) firmly attached to the body equipped with automatic ratchet tightener.
Maximum load of use: F1: 800 daN, F2: 400 daN, F3: 120 daN.


Reference	Utilisation	Groove bottom diameter (mm)	Capacity (mm)	Maximum load (daN)	Hook capacity (mm)	Weight (kg)
MO-375/150	Bare cables	160	22	1 000	25	1.55
MO-375/250	Bare cables	250	38	1 000	25	2.1
MO-375/300	Bare cables	300	36	1 500	25	2.85
MO-375/400	Bare cables	400	80	2 000	NC*	15.0
MO-371/01	Insulated cables	140	80	800	24	1.5
MO-371/100	Bracket with strap for MO-371/01		-	800	-	2.2

* NC : not communicated.



MO-375/...

MO-371/100

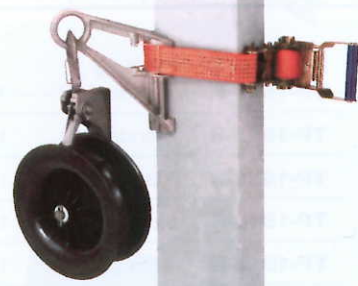

MO-371/01

Opening block

For elevation handling, single block and tackle and return block.
Can also be used as uncoiling block.
Aluminium alloy - block assembled on needle bearings.
Block Ø at groove bottom: 114 mm.
Maximum rope Ø: 16 mm.
Permissible load on rope strands: 250 daN.
Hook opening: 33 mm.

MO-308 Weight: 3 kg



Ratchet lift-chain hoists

Precise: 1.3 to 0.3 mm travel.
Aluminium alloy body and lever.
360° short lever used without large effort.
Chain can enter from all angles.
Three position selector:
up - down - free chain.
Safety factor > 5.



Reference	Maximum lifting load (kg)	Overall width (mm)	Weight (kg)	
			run 1.50 m	run 5.00 m
MO-431/07	750	84	7.00	-
MO-435/07	750	84	-	10.35
MO-431/15	1 500	108	11.00	-
MO-435/15	1 500	108	-	15.80
MO-431/30	3 000	115	20.00	-

Guying equipment

Used whenever pole stability is doubtful.
Hinged jaw device installed, from the ground, at a 6 to 8 m height using connectable rods.
Guy wires fixed on jaws* and staked to the ground by rods ensure pole stability.
Forged hot galvanised steel jaws, test load: 1 000 daN.
Control rod 6 m in elements of 1.20 m, aluminium alloy. Set of ropes: 3 guy wires 11 or 15 m + a strap with centre ring - with heart shaped thimble and snaps.
3 steel anchoring rods, 1 m.



MP-315 Guying equipment with 15 m guy wires in metallic box 480 x 340 x 200 mm and control rod + rods with carrying belt - 26.5 kg

MP-311 Guying equipment with 11 m guy wires in metallic box 480 x 340 x 200 mm and control rod + rods - 22 kg