


Short-circuiting systems for bare L.V. overhead lines

For conductors: 3 - 15 mm Ø.
Easily attached by snapping on with a firm downward pull.
Released by lateral swinging, no need to push upwards.
First grip installed by insulating stick.
First clamp/stick connection has automatic ratchet.
Waterproof bag.
To be completed with earthing equipment. See page 32.

IEC 61230 

CE

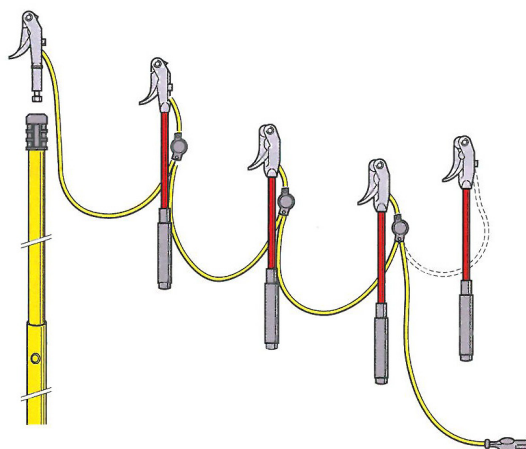


Packaging: waterproof bag 250 x 85 x 1 160 mm.

Reference	Rating (kA/1s)	Short-circuit cables (mm ²)	Weight (kg)	Number of clamps	Insulated telescopic stick
MT-404	3	16	3.4	3 MT-411/1 MT-411-C	CE-2-21-C/length: 2 m
MT-405	3	16	3.8	4 MT-411/1 MT-411-C	CE-2-21-C/length: 2 m
MT-406	3	16	4.2	5 MT-411/1 MT-411-C	CE-2-21-C/length: 2 m
MT-407	3	16	4.6	6 MT-411/1 MT-411-C	CE-2-21-C/length: 2 m

Short-circuiting and earthing systems

Lowlock system:
For conductors 3 to 21 mm Ø.
With clamps type "snap-on/screw-on".
Connecting cables: 35 mm² copper.

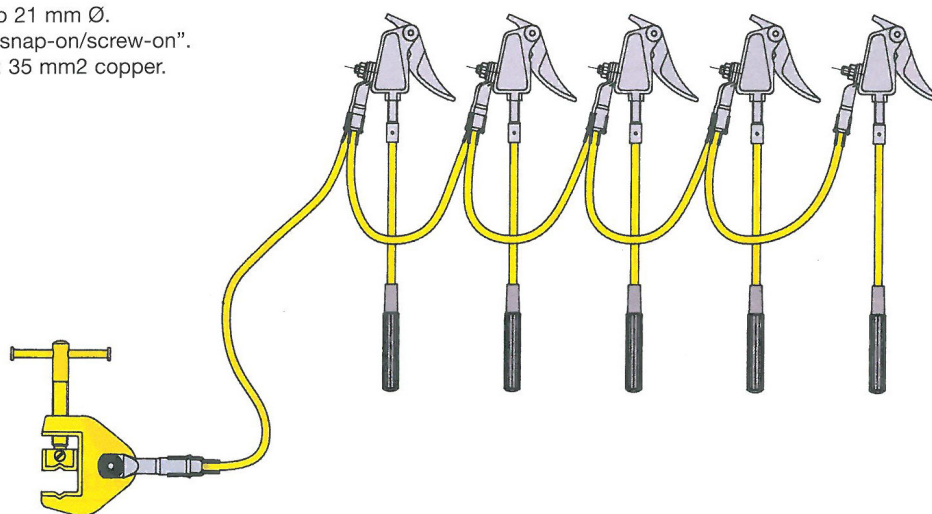


Reference	Rating (kA/1s)	Weight (kg)	Composition
MT-615/1-7,5	7.5	3	5 MT-616/1-03 contact clamps on handles (l = 0.35 m each) 4 braids of M-24-35 copper cable (1.00 m) 1 M-87-153 carrying bag 250 x 85 x 750 mm
MT-615/2-7,5	7.5	6.5	5 MT-616/1-03 contact clamps on handles 4 braids of M-24-35 copper cable (1.00 m) 1 braid of M-24-35 copper cable (7.00 m) 1 MT-840/1 earth clamp

For other models, please consult us.

Short-circuiting systems for insulated L.V. overhead lines

Connected to female sockets permanently installed on power lines. Equipment includes either 5 or 6 copper-aluminium alloy stubs with bayonet locking and insulating cap.

To be completed with earthing equipment. See below.

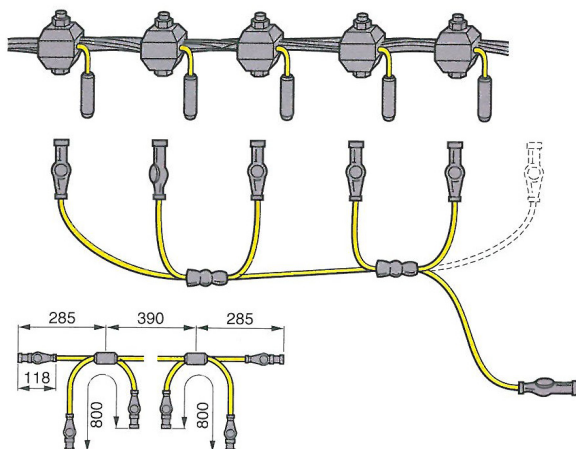

IEC 61230
CE

Packaging: polypropylene case - 234 x 215 x 75 mm.

Reference	Rating (kA/1s)	Short-circuit cables (mm ²)	Weight (kg)	Composition
MT-205	4	16	1.10	5 stubs
MT-206	4	16	1.50	6 stubs
MT-207	4	16	1.9	7 stubs

Earthing equipment

Earthing equipment with bayonet splicing. Earth rod to be ordered separately. See below.



Reference	Weight (kg)	Cable (m x mm ²)	Earth clamp
MT-244	2.5	10 x 10	MT-841
MT-245	3.0	10 x 16	MT-840/1
MT-248	3.0	15 x 10	MT-841
MT-249	3.8	15 x 16	MT-840/1

Packaging: polypropylene case - 234 x 215 x 75 mm.

Earth rod

For use with earthing equipment
Hexagonal 18 mm per side.
Galvanized steel.



MT-650 Length: 1 m - Weight: 2.2 kg